



eFlex Pedestrian Guardrail 3 Rail

Designed to guide pedestrians around a facility, restricting them to defined routes both inside and out.

The flexible, high-visibility guardrails clearly outline pedestrian walkways and act as a physical guardrail, ensuring visitors and personnel do not accidentally stray from safe areas.


Ideal for defining traffic flow, separating people from hazards, and equipping build base specifications.



Features and benefits




Ultra-low maintenance material is chemical and water resistant, non-corrosive, non-scratch and self colored so no repainting, rusting, flaking or corrosion.




Complete modularity allows simple layout configurations to guide pedestrians along designated safe routes.



Ergonomic design with no sharp edges.



Zinc nickel, electrophoretic coating on base plates as standard, provides advanced protection against corrosion damage.



Self coloured and UV stabilised for continued visibility and long lasting aesthetics with no repainting.




Specially designed rail insert creates snug grip at post joints and neat finish at post ends. Quick-detach feature for simple addition and reconfiguration of rails.




Ultra simple assembly with push-on caps for a fast installation.



Environmentally friendly and 100% recyclable.



Molecular reorientation during manufacturing creates a unique built-in memory that enables the guardrail to fully recover following impacts.




Revolutionary 3-Layered Material




- Inner strengthening core
- Central absorption zone
- Outer UV stabilised colour layer

Technical Information

How the load of a pedestrian barrier is calculated
BS 6180:2011 Barriers in and about buildings

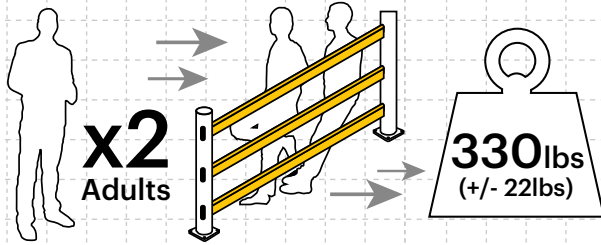

Weight of 2 x Leaning Adults =
Static Load Barrier should withstand

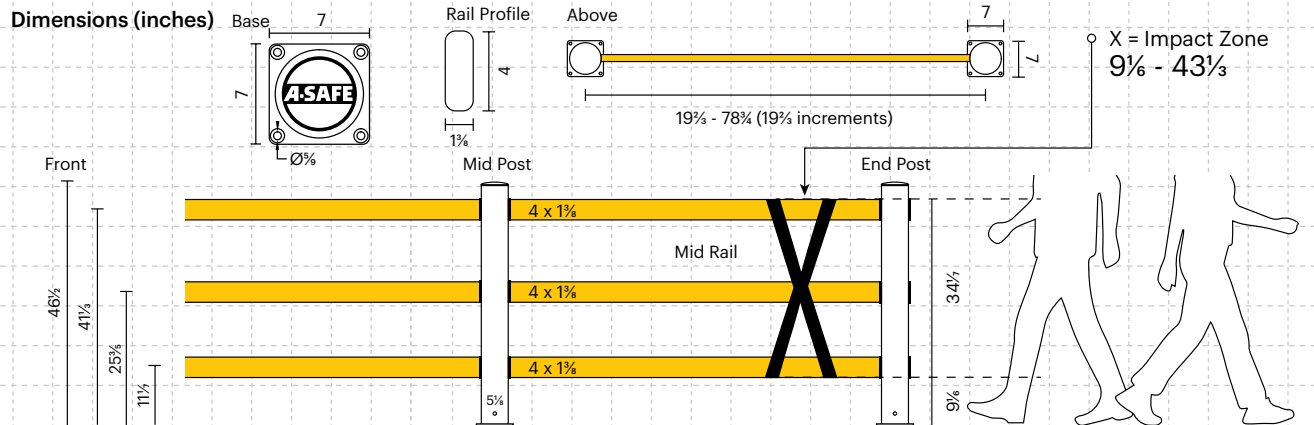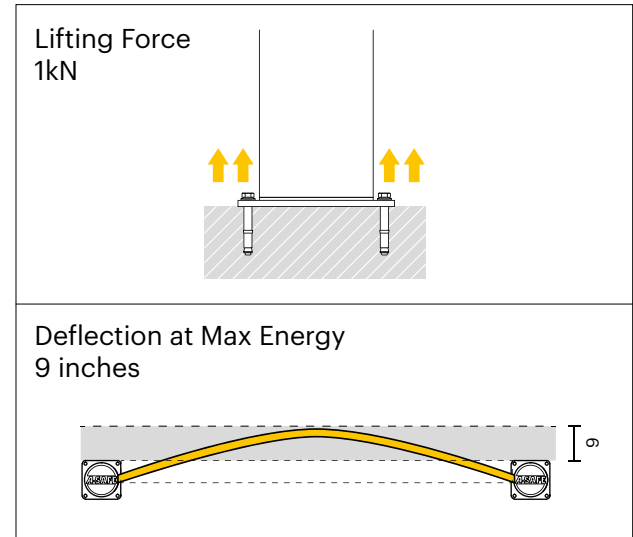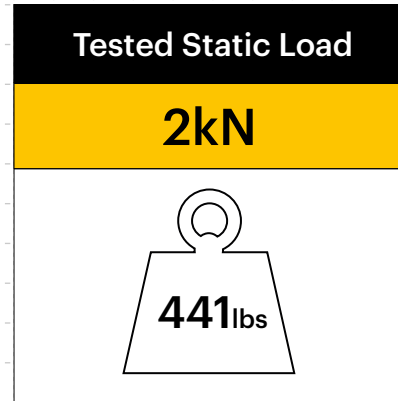

Material Properties	MEMAPLEX™
Temperature Range	14°F to 122°F
Ignition Temperature	698°F to 734°F
Flash Point	662°F to 698°F
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	No

Post Options



Rail Options



Color Combinations

*Please note that the RAL and PANTONE colors listed are the closest match to standard A-SAFE colors, but may not be exact matches of the actual product color and should be used for guidance only.

* Weathering scale 1 is very poor and 5 is excellent
** Light stability scale 1 is very poor and 8 is excellent

